


# Pullup Banner Artwork Specs

2060x850mm Print File  
(including Bleed)

2000x850mm banner view size  
(red line)

1990x840mm Internal Margin  
(white line)

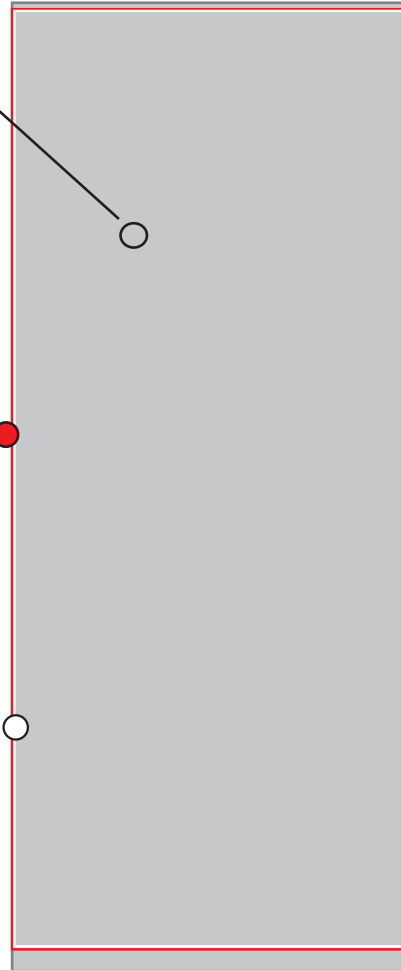

Your artwork needs to be supplied following these specs to print correctly.

For Pull Up Banners the print file needs to be 2060mm x 850mm

This includes 10mm bleed at the top of the banner and 50mm bleed at the bottom. There is NO bleed required on the sides

To ensure no information is lost, please keep all important information inside the specified trim area. (5mm internal margin)

allsigns print & design do not correct, modify or proof read your artwork. All files are printed as supplied to us.

allsigns print & design can not accept responsibility for errors due to files that do not meet these specifications.

## File Specifications:

- PDF File format
- CMYK Colour format
- All Fonts converted to Curves/Outlines
- Images at min 300 dpi